

FLYTECH



K730 SERIES

New Ultra-slim Panel PC



POS Stand

Printer Stand

Floor Stand


FEATURES

- Multiple widescreen options- 11.6"/15.6"/18.5"/21.5"
- Transformable stands- POS/Printer/Floor stand
- Flexible 4-sided peripherals- Fingerprint/2D scanner/NFC/MSR
- Aesthetic design- Narrow bezel display
- Modular design - Easy maintenance

A. Screen Sizes



B. Modularized 4-sided Peripheral

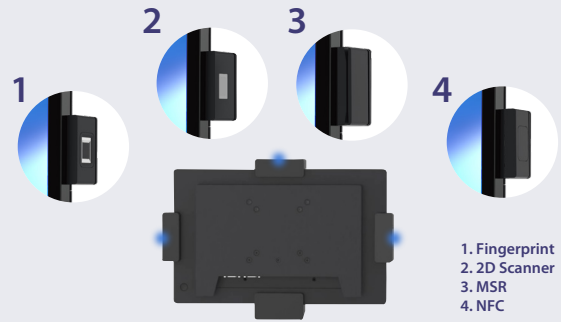

System	Motherboard	F14		D84U		F34		F84U	
	Processor	Qualcomm® 450		Intel® Kaby Lake 3965U Intel® Kaby Lake i3-7020U		Intel® Elkhart Lake Celeron J6412		Intel® Tiger Lake i3-1115G4	
	Memory	3GB LPDDR3		4GB DDR4		4GB DDR4		4GB DDR4	
	Storage	32GB eMMC		128GB SSD (M.2)		128GB SSD (M.2)		128GB SSD (M.2)	
	Supported OS	Android 9.0		Windows 10 IoT Enterprise, Linux		Windows 10 IoT Enterprise, Linux		Windows 10 IoT Enterprise, Linux	
I/O Ports	USB Type-A	2x USB3.0 2x USB2.0		2x USB3.0 2x USB2.0		2x USB3.0 2x USB2.0		2x USB3.0 2x USB2.0	
	USB Type-C (data only)	1x USB3.0		2x USB3.0		2x USB3.0		2x USB3.0	
	Serial Port	2x DB9 (Powered RS232) (default: 0V; COM1/COM2: 0V, 5V, 12V)							
	LAN	1x RJ45							
	Cash Drawer	1x RJ11							
	FeDP	K736: 1x Flytech Proprietary miniDP K737, K738, K739: 2x Flytech Proprietary miniDP							
	DC Jack	1x 4PIN (with latch)							
Display	Size and Resolution	K736: 11.6" 1920 x 1080 K737: 15.6" 1920 x 1080 K738: 18.5" 1366 x 768 K739: 21.5" 1920 x 1080							
	Touch Screen	True-Flat PCAP multi-touch							
Audio	Speaker	1x 3W							
Power	Power Supply	65W / 19V		120W / 19V		65W / 19V		120W / 19V	
Certificate	EMC & Safety	FCC Class A, CE Mark Class A, LVD							
Environment	Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)							
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)							
	Humidity	20% ~ 85% RH non-condensing							
Dimensions	W x D x H	K736: 277 x 180.5 x 40.8 mm (10.9" x 7.1" x 1.6") K737: 370 x 235 x 42.3 mm (14.6" x 9.3" x 1.7") K738: 453 x 273 x 50.2 mm (17.8" x 10.8" x 2") K739: 518 x 310 x 49.3 mm (20.4" x 12.2" x 1.9")							
Weight	Weight	K736: 1.4 kg (3.1 lbs) K737: 3.0 kg (6.6 lbs) K738: 4.4 kg (9.7 lbs) K739: 5.3 kg (11.7 lbs)							
Mounting	VESA Mount	K736: 75 x 75 K737, K738, K739: 75 x 75 / 100 x 100							
Options	Wireless LAN + BT	BT4.1 WiFi 802.11 a/b/g/n/ac (*built-in on F14 motherboard)		K736: M.2 WiFi/BT Module K737, K738, K739: WiFi+BT USB dongle					
	POE	POE module 802.3bt Type 3 (up to 60W)		-		-		-	
	MSR	3-Track MSR							
	Fingerprint	Fingerprint Reader							
	NFC	-		NFC Reader					
	Scanner	2D Scanner							
	Camera	5MP Camera (with microphone)							
	Pin Pad	Supported Verifone® P400/VX805/VX820, Ingenico iPP 350/320, LANE 3000							
	Cable	Converter cable for FeDP to VGA Converter cable for FeDP to HDMI							
	Light Bar	Light Bar Module							
	Stand	POS Stand, Printer Stand, Floor Stand							
	Printer Kit	Epson® TM-m30/TM-T88VI, Star TSP-654/TSP-100/mc-Print3, Xprinter XP-R330H							

* PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE *

Taiwan - Headquarters

No.168, Sing-ai Rd., Neihs District,
Taipei City 11494, Taiwan, R.O.C.
Tel: 886-2-8791-4988
Fax: 886-2-8791-4966
E-mail: sales@flytech.com.tw
www.flytech.com

U.S.A. - California

271 East Brokaw Road, San Jose,
CA 95112, U.S.A.
Tel: 1-510-257-5180
Fax: 1-510-257-5181
E-mail: sales@flytech.com

China - Shanghai

3F Building 39, No. 333 Qin Jiang Rd.,
Shanghai 200233, P.R.China
Tel: 86-21-5426-1555
Fax: 86-21-5426-1001
E-mail: sales@flytech.com.cn
www.flytech.com.cn

China - Hong Kong SAR

Rm01, 6/F, Blk A, Tonic Industrial Centre,
26 Kai Chung Road, Kowloon Bay,
Kowloon, Hong Kong.
Tel: 852-3525-5800
Fax: 852-2751-7447
E-mail: sales@flytech.com.hk

