

Simply Better POS!

Stylish and versatile design

高效能

靈活度

細緻感


台灣生產
工業規格設計



(選配)



▲ VFD 客顯 (選配)

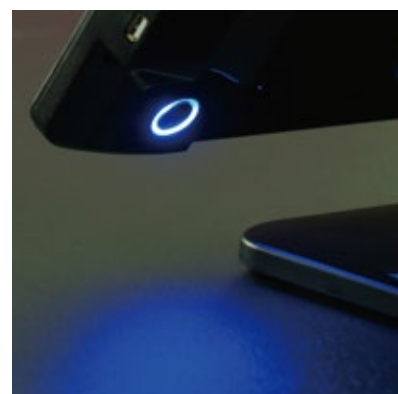

▲ 冷光LED電源鍵



▲ 9.7 / 14.1 / 15 背掛式第二螢幕
(選配)



▲ 側邊式 USB

V190-J U Datasheet

System Configuration	V190- J	V190- U
Intel® Processor	Intel Bay Trail Quad Core Celeron J1900 (2GHz up to 2.42GHz, 2M cache)	Intel IVY Bridge I3-3217U (1.8GHz, 3M cache)
Memory	DDR3L 1333/1600 MHz SO-DIMM x 1 Default 2G, max. 8GB	
Storage	mSATA SSD	
Power Supply	DC 12V/5A or 6A external power adapter. AC100 to 240V full range.	
O/S Compatibility	Windows 7, POS Ready7, Windows 10 IoT, Linux	Windows XP/ 7, POS Ready7, Windows 10 IoT
Physical Dimensions (W*H*D)	Width: 355mm / Height: 298mm (full extended); 280mm (low-profile); 127mm (folded-flat) / Stand depth: 250mm	
System Weight(with stand)	5.2Kg / 2.7Kg (without stand)	
Wall Mount	VESA 100 x 100mm, 75 x 75mm Compliant	
Product Certification	CE / FCC / BSMI / RoHS	
Operation Temperature	0°C to 40°C	
Humidity	15% ~ 80%	

LCD & Touch Panel	
Display	15" LED-backlight display Brightness: 300~350 cd / m2
Resolution	1024 x 768 (default)
Touch	Flat Type Projected Capacitive Touch (PCAP), USB interface

I/O Connectivity		
USB	6 port , 4 x USB 2.0 , 2 x USB 3.0	
LAN	1 port RJ-45 LAN with activity and link LEDs	
SERIAL	2 x DB-9	
Cash DRAWER	1 port RJ11, 12V(com6)	NA
AUDIO	1 x Line out,1 x Mic In	
VGA	1 x DB-15	
HDMI	NA	1 x HDMI
Extension Slot	mini-PCI-e slot x 1	

V190-A Datasheet

- ▶ 全平面15吋300~350流明高亮度工業級電容觸控螢幕
- ▶ 高效能四核心ARM® Cortex™-A17處理器
- ▶ 可相容於Android 8.1及Linux作業系統
- ▶ 內建Mini-HDMI, 支援第二顯示器或其他多元運用
- ▶ 工業品質等級設計, 堅固耐用又兼具方便性

System Configuration	
CPU Processor	ARM Rockchip RK3288, Quad-core Cortex-A17+GPU Mali-T764
Memory	DDR3 2G(default) up to 4G
Storage	eMMC 8G / 16G(default) / 32GB + 1 x Micro SD Card Slot
Power Supply	DC12V/5A external power adapter. AC100 to 240V full range
WIFI/BT	IEEE 802.11a/b/g/n/ac BT.4.0 (Option)
O/S Compatibility	Android 8.1 / Linux
Physical Dimensions (W*H*D)	Width: 355mm / Height: 298mm (Full Extended); 280mm (Low-Profile);127mm (Folded-Flat) / Stand Depth: 250mm
System Weight	4.7Kg (with stand)
Wall Mount	VESA 100 x 100mm, 75 x 75mm Compliant
Product Certification	CE / FCC / RoHS
Operation Temperature	0°C to 40°C
Humidity	15% ~ 80%

LCD & Touch Panel	
Display	15" LED-backlight display Brightness: 300~350 cd / m2
Resolution	1024 x768 (default)
Touch	Flat Type Projected Capacitive Touch (PCAP), USB interface

I/O Connectivity	
USB	5 port , 4 x USB 2.0 , 1 x USB OTG
Lan	1 x LAN (IEEE 802.3 10 /100 /1000 Mbps Ethernet, RJ45 with LED)
Serial	2 x Serial(TTL) ports (Option)
Cash Drawer	1 x RJ11 port for cash drawer (Option)
Display Support	2 Independent displays (Main Display + HDMI)
Display-OUT	1 x Mini HDMI
SD Card	1 x Micro SD card

Peripheral	
Customer Display	9mm VFD
2 nd Display	9.7"/14.1"/15" 2 nd LCD monitor

Product specifications subject to change without prior notice.

Certifications



柏仕達科技股份有限公司

新北市新莊區新北大道三段5號12樓之6

TEL:+886-2-8521-5980 ,8522-5608

FAX:+886-2-8522-5861

Email : sales@p2-plus.com

http://www.p2-plus.com